




INSTRUCTION to mount STARTER to engine

Remove the 3 bolts (Torx key) from the studs (the 2 washers are no longer needed).

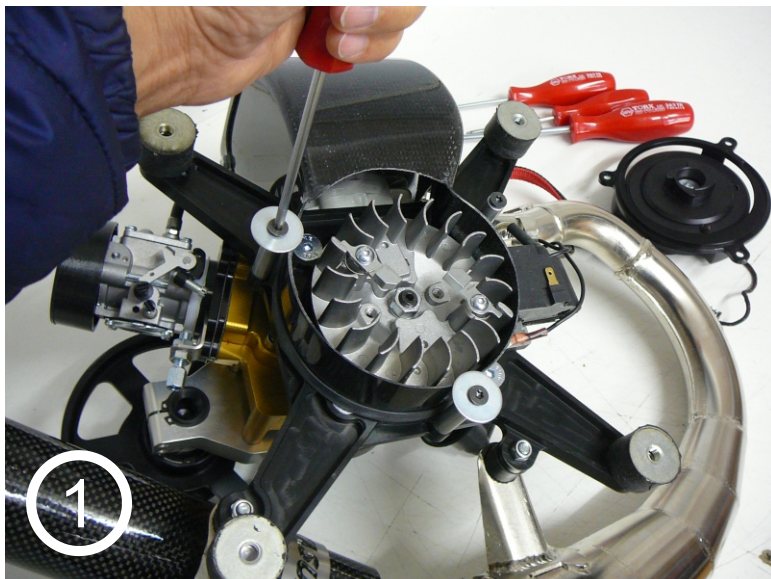

Well place starter and put bolts in position. Important! - use Loctite 243 thread locker to secure the bolts.



Tighten bolts to complete starter installation (we refer to the Main Torques Catalogue in the engine manual).

